

Housing Specification & Features


UV Stabilized Plastic
Flame Rating: 5VA/V-0 (Grey), HB (colors)
Fiberglass Reinforced Polycarbonate
External Ground Connection Available
Meets all ANSI and UL Dimension Requirements for Meter Sockets
Offered in Standard Profile (2.4" Stand-out) and Low Profile (1.5" Stand-out)



The AE Products Meter Socket Converter will convert various meter forms to fit the desired application.
Example:

A three phase service converted to a single phase.

Dimensions

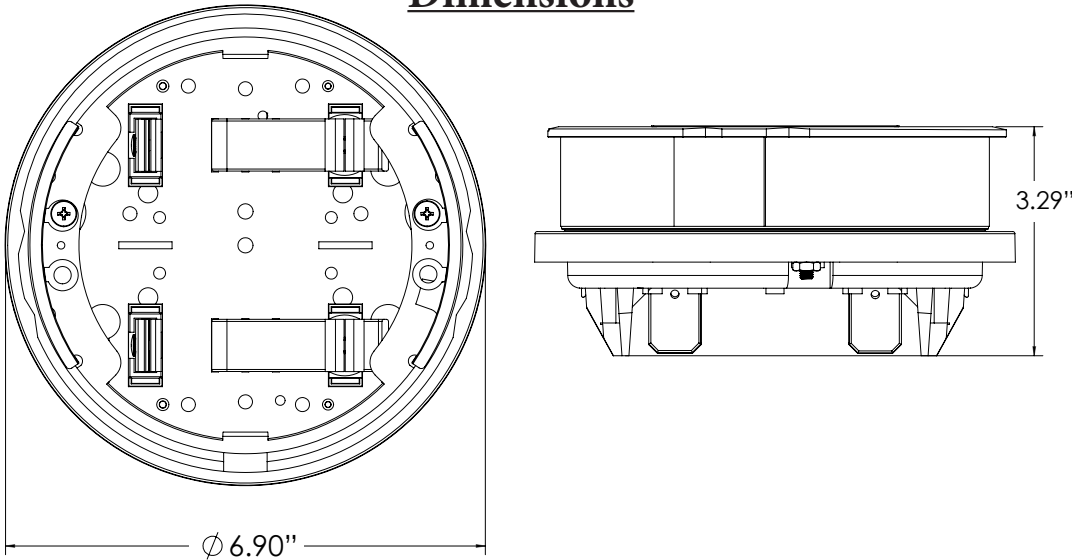

Model Number Configuration

(Diagrams are not to scale)

CNV - LP - 16S - 01 / 02S - _____

Standard Size	Meter Box (Socket)	Color	Conversion	Ground
LP - Low	Form	01 - Gray	Meter Form	GND - Meter Ground
Profile	01S - 1S	02 - Black	01S - 1S	(Strap)
SP - Standard	02S - 2S	03 - Blue	02S - 2S	GRW - Auxiliary
Profile	12S - 12S	04 - Clear	12S - 12S	Ground (wire)
	14S - 14S	05 - Fern Green	14S - 14S	
	15S - 15S	06 - Fluor Green	15S - 15S	
		07 - Orange	16S - 16S	
		08 - Red		
		09 - Pink		
		10 - Off White		
		11 - Yellow		

Additional conversions are available. Please contact the factory for all options.

Note: You may add additional options as needed by extending the model number