

Stay Hot with Potential/Service Disconnect



Housing Specification & Features

UV Stabilized Plastic
Flame Rating: 5VA/V-0 (Grey), HB (colors)
Fiberglass Reinforced Polycarbonate
2.4" Standard Profile Stand-Out Height
1.5" Low Profile Stand-Out Height



The AE Products Stay Hot with Potential/Service Disconnect disconnects customer load but maintains power to the electronic meter. The meter maintains reading and communications link for AMR/AMI operations while disabling the load side.

Dimensions

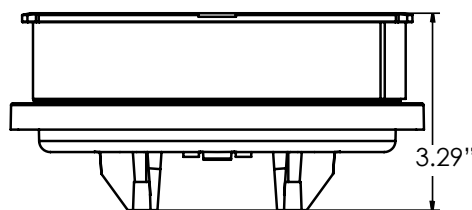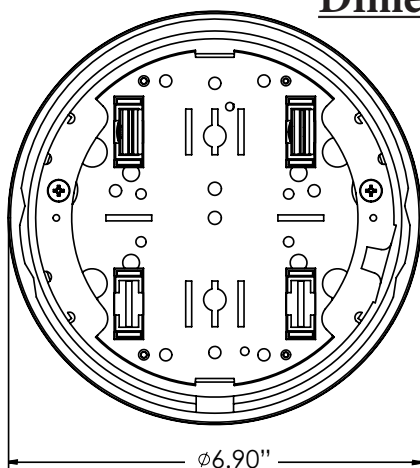

Model Number Configuration

(Diagrams are not to scale)

SDA - LP - 02S - 01 / EME - _____

Standard Size	Conversion	Color	Options (multiple options allowed)	Ground
LP - Low Profile	Meter Form	01 - Gray	Service Disconnect Adapter	GND - Meter Ground (Strap)
SP - Standard Profile	01S - 1S	02 - Black	EME - Electronic Meter Energizing	GRW - Auxiliary Ground (Wire)
	02S - 2S	03 - Blue	TLT - Meter Tilt Visual Indication	Jaw Blade Configuration
	03S - 3S	04 - Clear	EMT - Electronic Meter Energizing & Meter Tilt Visual Indication	JB3 - 3 o'clock position
	04S - 4S	05 - Fern Green		JB6 - 6 o'clock position
	05S - 5S	06 - Fluor Green		JB9 - 9 o'clock position
	07S - 7S	07 - Orange		
	12S - 12S	08 - Red	LED Diagnostics	Ringless Style Lock
	13S - 13S	09 - Pink	LNG - Line Side Status (Green)	RL - Locking Mechanism
	14S - 14S	10 - Off White	LNR - Line Side Status (Red)	(Available on SP version ONLY)
	15S - 15S	11 - Yellow	LDG - Load Side Status (Green)	
	16S - 16S		LDR - Load Side Status (Red)	
	17S - 17S		PWR - Power On (Red)	
	24S - 24S			
	35S - 35S			
	45S - 45S			

Note: You may add additional options as needed by extending the model number.