

# 50AMP Disconnect

## Housing Specification & Features



UV Stabilized Plastic
Flame Rating: 5VA/V-0 (Grey), HB (colors)
Fiberglass Reinforced Polycarbonate
NEMA 1
Sturdy Handle for Easy Removal
ANSI C12
10kAIC @ 480V
120/240V or 240/480V
Optional Push-In Stabs for Easier Insertion with Bypass Open



This device is NOT intended for Continuous Use  
 Keep Dry. Do Not Use in Rain

The AE Products 50amp Disconnect is used to safely disconnect and reconnect a customers electrical load by bypassing the meter sockets under load. This device comes with a 50A, 2-pole breaker with a trip curve C and load side power indicator light. It is for use with lever bypass meter sockets and fits 12S and 2S meter forms.

## Dimensions

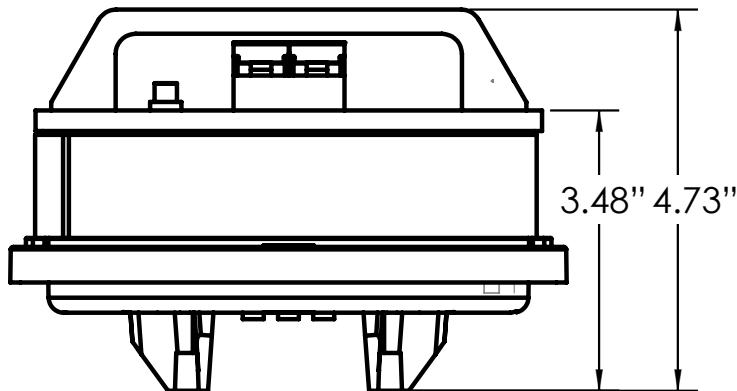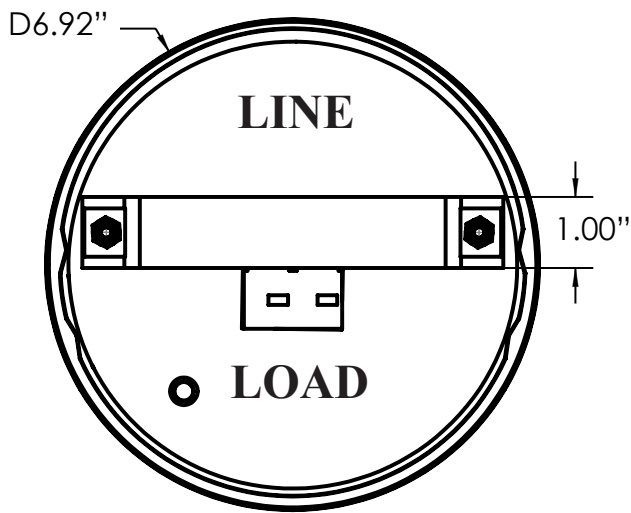

## Model Number Configuration

**SDA - 50 - 01 /** \_\_\_\_\_

(Diagrams are not to scale)

Handle Color  
 01 - Gray  
 07 - Orange  
 08 - Red

push in stabs